

JOM系列无菌取样阀特性
SGM Series Aseptic Sampling Valve Features

JOM系列无菌取样阀采用PTFE隔膜密封，通过膜片的伸缩来开启和关闭阀门。该系列分为不锈钢手柄快开型，塑料手柄快开型，手轮微调型、气动型和手气一体型五种开启形式。手动快开型和气动型带弹簧自动复位功能，可适应多种实际工况需求。



The JOM Series Sterile Sampling Valves are sealed with PTFE septum to open and close the valve through telescoping of the diaphragm. The series is divided into stainless steel handle quick opening type, plastic handle quick opening type, hand wheel fine-tuning type, pneumatic type and hand gas One of five open form. Manual quick-open type and pneumatic automatic reset function with spring, can adapt to a variety of The actual working conditions.


开启形式(JOM)
Open form(JOM)



技术参数
Technical Parameters

接口形式: 焊接, 卡箍, 无菌法兰	Interface form: welding, clamps, sterile flanges
手动型最大压力: +10bar(145psi)	Greatest pressure: +10bar(145psi)
弹簧复位型最大压力: +6bar +145psi	Spring reset type maximum pressure: +6bar(87psi)
适用温度: -10℃至+140℃	proper temperature: -10℃ to +140℃
阀体材质: SS304 SS316L	Body material: SS304 SS316L
密封材质: PTFE	Sealing material: PTFE


卡箍型无菌取样阀(JOM)
Clamped Aseptic Sample Valve(JOM)

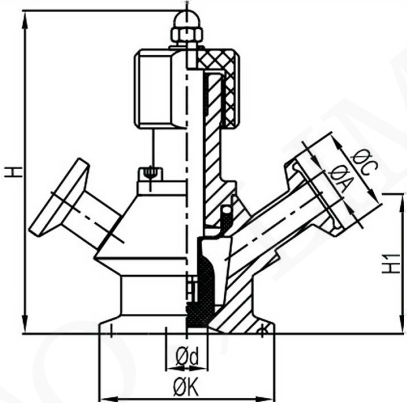

JO-1057

SIZE	d	K	A	C	H1	H
DN6	6	25.2	5	25.2	37.5	85
DN8	8	25.2/50.5	5	25.2	44.5	85
DN10	9.5	25.2/50.5	9.5	25.2	44.5	85
DN15	12	50.5	9.5	25.2	41.5	93


卡箍型无菌取样阀(JOM)
Clamped Aseptic Sample Valve(JOM)

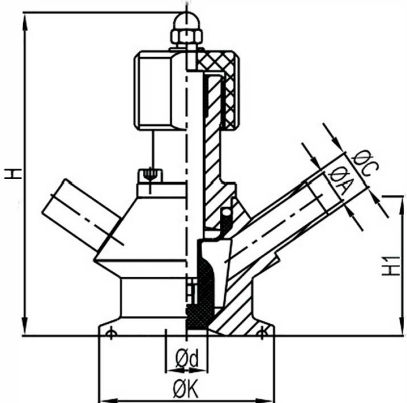

JO-1058


SIZE	d	K	A	C	H1	H
DN6	6	25.2	5	8	37.5	85
DN8	8	25.2/50.5	5	8	44.5	85
DN10	9.5	25.2/50.5	9.5	12.7	44.5	85
DN15	12	50.5	9.5	12.7	41.5	93

卡箍型无菌取样阀(JOM)
Clamped Aseptic Sample Valve(JOM)

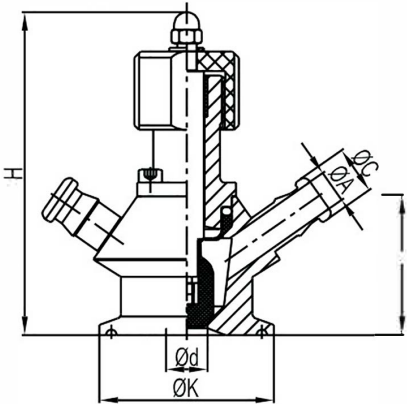

JO-1059


SIZE	d	K	A	C	H1	H
DN6	6	25.2	5	9.5	37.5	85
DN8	8	25.2/50.5	5	9.5	44.5	85
DN10	9.5	25.2/50.5	9.5	14	44.5	85
DN15	12	50.5	9.5	14	41.5	93

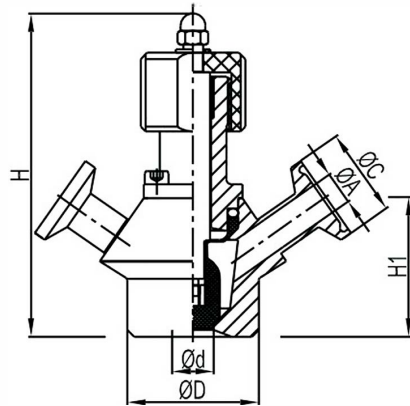

焊接型无菌取样阀 (JOM)
Welded Aseptic Sample
Valve(JOM)

J0-1060


SIZE	d	D	A	C	H1	H
DN6	6	28	5	25.2	37.5	85
DN8	8	28	5	25.2	44.5	85
DN10	9.5	28	9.5	25.2	44.5	85
DN15	12	38	9.5	25.2	41.5	93

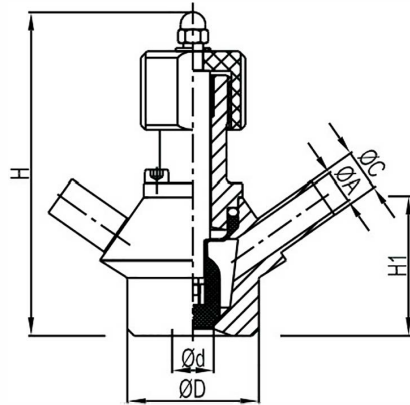

焊接型无菌取样阀 (JOM)
Welded Aseptic Sample
Valve(JOM)

J0-1061


SIZE	d	D	A	C	H1	H
DN6	6	28	5	8	37.5	85
DN8	8	28	5	8	44.5	85
DN10	9.5	28	9.5	12.7	44.5	85
DN15	12	38	9.5	12.7	41.5	93

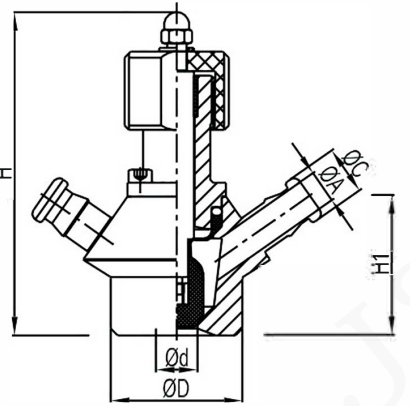

焊接型无菌取样阀 (JOM)
Welded Aseptic Sample
Valve(JOM)

J0-1062


SIZE	d	D	A	C	H1	H
DN6	6	28	5	9.5	37.5	85
DN8	8	28	5	9.5	44.5	85
DN10	9.5	28	9.5	14	44.5	85
DN15	12	38	9.5	14	41.5	93

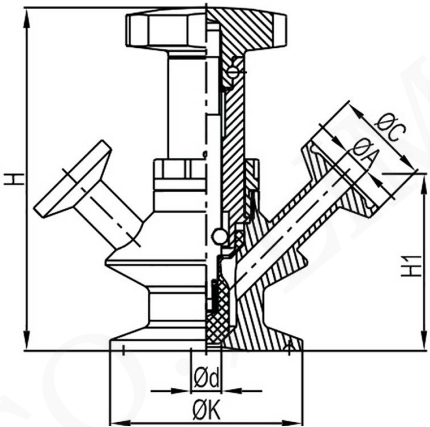

卡箍型无菌取样阀 (JOM-HT)
Clamped Aseptic Sample Valve(JOM-HT)

J0-1063


SIZE	d	K	A	C	H1	H
DN8	8	25.2/50.5	7.2	25.2	46	90
DN10	9.5	25.2/50.5	7.2	25.2	46	90
DN15	12	50.5	9.5	25.2	44	94.5

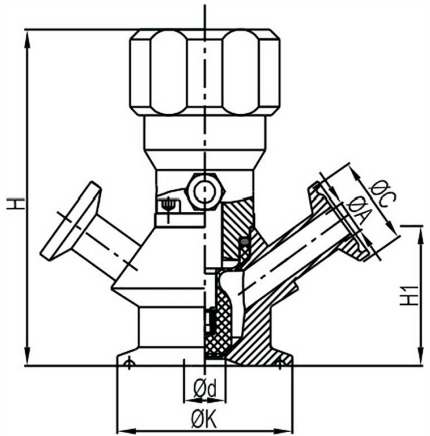

气动无菌取样阀 (JOM) Pneumatic
aseptic sampling valve(JOM)

J0-1064

SIZE	d	K	A	C	H1	H
DN6	6	25.2	5	25.2	37.5	91
DN8	8	25.2/50.5	5	25.2	44.5	92
DN10	9.5	25.2/50.5	9.5	25.2	44.5	92
DN15	12	50.5	9.5	25.2	41.5	98

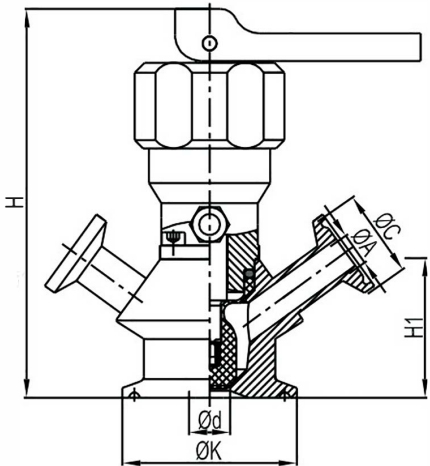


手/气—体无菌取样阀 (JOM)
Hand/ gas integrated sterile sampling valve(JOM)

J0-1065

SIZE	d	K	A	C	H1	H
DN6	6	25.2	5	25.2	37.5	105
DN8	8	25.2/50.5	5	25.2	44.5	106
DN10	9.5	25.2/50.5	9.5	25.2	44.5	106
DN15	12	50.5	9.5	25.2	41.5	112


卡箍型无菌取样阀(SGM)
Clamped Aseptic Sample Valve(SGM)

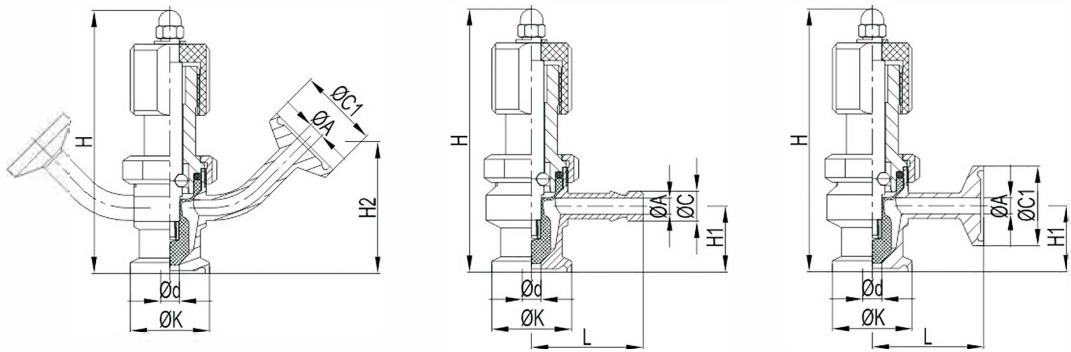


J0-1066

SIZE	d	K	A	C	C1	L	H1	H2	H
DN6	6	25.2	5	9.5	25.2	35	21	42	84

灭菌流向示意图
Sterilization flow diagram




取样流向示意图
Sample flow diagram



无菌取样阀与无菌法兰(SGM)
Sterile sampling valves and sterile flanges(SGM)

J0-1067

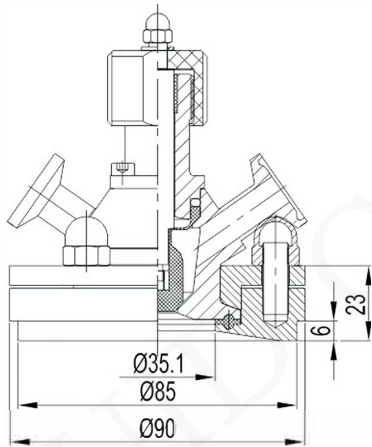


卫生取样阀
Sanitary sampling valve

椭圆形手轮
Oval hand wheel



圆形手轮
Round the handwheel



硅橡胶阀头
Silicone rubber valve head




PTFE阀头
PTFE valve head




斜出口
Oblique export




直出口
export of straight




J0-1069

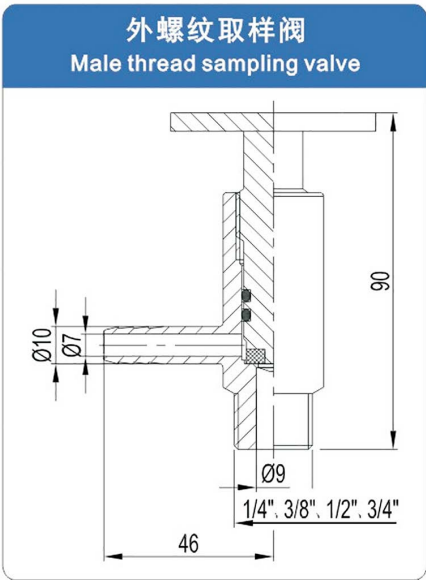

J0-1070

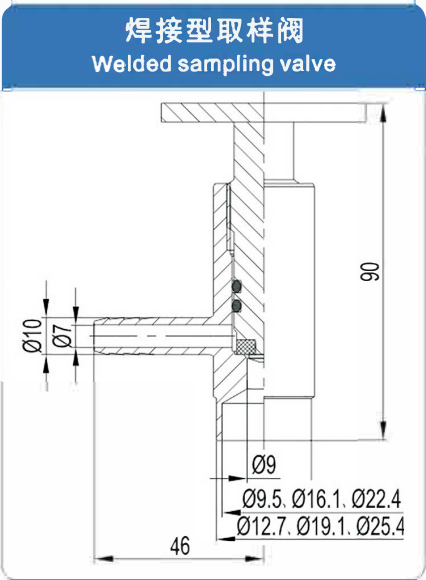

J0-1071

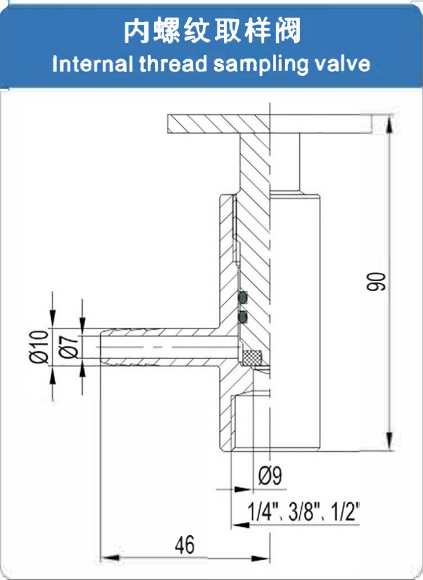

J0-1068

